



# Цены 2013

## Дымососы, автоматика, аксессуары



type	RSV
RSV160-4-1	1x230V, 0.2
RSV200-4-1	1x230V, 0.4
RSV250-4-1	1x230V, 0.8
RSV315-4-1	1x230V, 1.8A
RSV400-4-1	1x230V, 2.9A
RSV400-4-2	3x230V, 4.0A
RSV450-4-2	3x230V, 6.5A




## RS - Chimney Fans Horizontal Discharge



Fan Type	Motor	RPM	Motor 1 x 230 V Amp/kW*	Dimensions					Weight kgs	Price €	Suitable Control
				A mm	B x B mm	C Ø/mm	D mm	E Ø/mm			
RS009-4-1	Axial vane	1400	0,3 / 0,05	250	300	285	75	220	9	1.503	EFC16/EFC18/EW40
RS009-4-1-02	Axial vane & octagonal flange	1400	0,3 / 0,05	250	300	285	75	220	9	1.543,	EFC16/EFC18/EW40
RS012-4-1	Axial vane	1400	0,3 / 0,09	275	365	350	85	280	14	1.791,	EFC16/EFC18/EW40
RS012-4-1-02	Axial vane & octagonal flange	1400	0,3 / 0,09	275	365	350	85	280	14	1.847,	EFC16/EFC18/EW40
RS014-4-1	Axial vane	1400	0,6 / 0,13	330	420	395	100	330	18	2.425,	EFC16/EFC18/EW40
RS016-4-1	Axial vane	1400	1,2 / 0,29	450	480	450	100	380	25	3.337,	EFC16/EFC18/EW40
RS255-4-1	Centrifugal impeller	1400	0,35 / 0,06	260	300	350	35	200	14	2.012	EFC16/EFC18/EW40
RS285-4-1	Centrifugal impeller	1400	0,8 / 0,18	290	355	395	35	230	20	2.266,	EFC16/EFC18/EW40

\* Max. power consumption  
Ambient temperature: 20°C.  
RPM is adjustable when using speed controller  
Motor protection class IP 54  
Insulation class F

## RSV - Chimney Fans Vertical Discharge



Fan Type	Motor	RPM	Motor 1 x 230 V Amp/kW*	Dimensions					Weight kgs	Price €	Suitable Control
				A mm	B x B mm	C x C mm	D Ø/mm	E mm			
RSV009-4-1	Axial vane	1400	0,14 / 0,05	250	310	240	215	70	13	1.824,	EFC16/EFC18/EW40
RSV012-4-1	Axial vane	1400	0,4 / 0,13	280	390	310	275	80	17	2.140,	EFC16/EFC18/EW40
RSV014-4-1	Axial vane	1400	0,8 / 0,16	335	485	385	335	100	24	2.945,	EFC16/EFC18/EW40
RSV016-4-1	Axial vane	1400	1,8 / 0,32	380	580	465	365	115	35	3.880,	EFC35/EW40
RSV160-4-1	Centrifugal impeller	1400	0,2 / 0,04	250	310	240	160	70	13	1.883,	EBC20
RSV200-4-1	Centrifugal impeller	1400	0,4 / 0,07	280	390	310	200	80	18	2.158,	EBC20
RSV250-4-1	Centrifugal impeller	1400	0,8 / 0,16	335	485	385	250	100	27	3.139,	EBC20
RSV315-4-1	Centrifugal impeller	1400	1,8 / 0,37	380	580	465	315	115	37	4.025,	EBC20
RSV400-4-1	Centrifugal impeller	1400	2,9 / 0,60	430	650	525	400	130	47	4.910,	EBC20

Fan Type	Motor	RPM	Motor 3 x 230 V Amp/kW*	Dimensions					Weight kgs	Price €	Suitable Control
				A mm	B x B mm	C x C mm	D Ø/mm	E mm			
RSV400-4-2-001	Centrifugal impeller, 60Hz**	1720	3,5 / 0,75	480	650	525	400	130	49	5.597,	EBC20+ FRK005
RSV450-4-2-001	Centrifugal impeller, 60Hz**	1720	6,5 / 1,50	590	650	525	410	220	58	6.479,-	EBC20+FRK006

\* Max. power consumption  
Ambient temperature: 20°C.  
RPM is adjustable when using speed controller

\*\*The 60Hz 3-phase motors (suffix -4-2-001) can only be used with a frequency converter, see page 8.  
Motor protection class IP 54  
Insulation class F for all fans with suffix -4-1. 4-2-001 = Insulation class H.  
Prices for RSV250 / RSV315 / RSV400 with 3x400 V motors (suffix -4-3) are available upon request.

## RHG

### For stoves and small gasfires

Fan Type	Motor	RPM	Motor 1 x 230 V Amp/kW*	Dimensions			Weight kgs	Price €	Suitable Control
				A mm	B mm	C Ø/mm			
RHG160-4-1	Centrifugal impeller	1400	0,4 / 0,09	300	290	153	10	<b>2.080,-</b>	EFC21/EFC25**

## RSVG / RSHG

### For open gasfires or atmospheric boilers



Fan Type	Motor	RPM	Motor 1 x 230 V Amp/kW*	Dimensions					Weight kgs	Price €	Suitable Control
				A mm	B x B mm	C x C mm	D Ø/mm	E mm			
<b>RSHG012-4-1</b>	Axial vane	1400	0,3 / 0,07	275	365	350	85	165	14	<b>2.094,-</b>	EFC21/EFC25**
<b>RSHG014-4-1</b>	Axial vane	1400	0,35 / 0,06	330	420	395	100	188	18	<b>2.374,-</b>	EFC21/EFC25**
<b>RSVG200-4-1</b>	Centrifugal impeller	1400	0,35 / 0,08	280	390	310	200	80	18	<b>2.687,-</b>	EFC21/EFC25**
<b>RSVG250-4-1</b>	Centrifugal impeller	1400	0,8 / 0,18	335	485	385	250	100	26	<b>3.655,-</b>	EFC21/EFC25**
<b>RSVG315-4-1</b>	Centrifugal impeller	1400	1,8 / 0,37	380	580	465	315	115	35	<b>4.562,-</b>	EFC21/EFC25**


\* Max. power consumption

For dimensions on RSHG and RSVG refer to RS page 3 and RSV page 4

\*\* Please contact your technical centre to check the compatibility of the EFC25 controller, as it is not suitable for all fireplaces

## RSG - Chimney Fans

### Located on external wall



Fan Type	Motor	RPM	Motor 1 x 230 V Amp/kW*	Dimensions				Weight kgs	Price €	Suitable Control
				A mm	B mm	C mm	D outside Ø/mm			
<b>RSG125-4-1</b>	Centrifugal impeller	1400	0,3 / 0,04	320	336	220	121	11	<b>1.863,-</b>	EFC21/EFC25**
<b>RSG150-4-1</b>	Centrifugal impeller	1400	0,14 / 0,05	380	400	240	146	14	<b>2.126,-</b>	EFC21/EFC25**
<b>RSG200-4-1</b>	Centrifugal impeller	1400	0,35 / 0,11	453	478	275	196	20	<b>2.402,-</b>	EFC21/EFC25**

\* Max. power consumption

\*\* Please contact your technical centre to check the compatibility of the EFC25 controller, as it is not suitable for all fireplaces

## Control systems for solid fuel fireplaces



Control Type	Description	Price €
<b>EFC16-EU-01</b>	Control system with speed control max. 1.5A	<b>207,-</b>
<b>EFC18-EU-01</b>	Control system with speed control and temperature sensor max. 1.2A	<b>762,-</b>
<b>EFC35</b>	Electronic speed control max 3.5A	<b>350,-</b>
<b>EFC35S</b>	Electronic speed control max 3.5A, splash proof	<b>391,-</b>
<b>EW41-EU-01</b>	Wireless controller for solid fuel incl. Temperature sensor	<b>1.473,-</b>
<b>EW41REPEATEREU</b>	Unit for increased radio transmission	<b>545</b>
<b>1100703</b>	EW41 mounting kit for steel flues	<b>28,-</b>
<b>0502232</b>	EW41 mains power adaptor	<b>49,-</b>

## Control systems for gas fireplaces



Control Type	Description	Price €
<b>EFC21-EU-01</b>	Control system with speed control and fail-safe supervision for gas fireplaces and stoves.	<b>762,-</b>
<b>EFC25-EU-01</b>	Control system with remote control and fail safe supervision for use with suitable gas fires only.	<b>966,-</b>
<b>0501014</b>	IR-sensor for EFC25 for remote activation, 10 m. cable	<b>72,-</b>
<b>SMG 1/4"</b>	Single solenoid valve 1/4" for gas - Up to 15kW	<b>400,-</b>
<b>SMG 1/2"</b>	Single solenoid valve 1/2" for gas - Above 15kW	<b>207,-</b>
<b>EFC-BOX</b>	Surface-mounted back-box for EFC21 / EFC25	<b>157,-</b>

## Silencers For wall mounted fans RSG


Silencer Type	Description	Dimensions				Price €
		A mm	B inside Ø/mm	C inside Ø/mm	D Ø/mm	
<b>SLR125-280</b>	Silencer for RSG125	280	125	128	240	<b>315,-</b>
<b>SLR150-280</b>	Silencer for RSG150	280	150	153	265	<b>316,-</b>
<b>SLR200-280</b>	Silencer for RSG200	280	203	206	318	<b>328,-</b>
<b>SLR200-600</b>	Silencer for RSG200, L=600mm	600	203	206	318	<b>715,-</b>

## Control systems for Boilersystems



EBC20

Control Type	Description	Price €
<b>EBC20-EU-01</b>	Constant pressure regulation incl. XTP-sensor. For single and multiple boiler systems with single-stage, two-stage, and modulating burner. Automatic disconnection of boiler in case of insufficient draught. Possibility of adjustable pre-run and post-run, manual reset and pressostat check.	<b>1.959,-</b>



ES12

Box Type	Description	Price €
<b>ES12-EU-01</b>	Relay box for EBC20 and up to 4 boilers. Use more relay boxes for more boilers.	<b>761,-</b>



FRK-005

Converter Type	Description	Price €
<b>FRK-005</b>	Frequency converter for RSV400-4-2	<b>1.700,-</b>
<b>FRK-006</b>	Frequency converter for RSV450-4-2	<b>1.700,-</b>

## Dampers




EKG

Damper Type	Description	Price €
<b>EKG110</b>	Balancing damper for flue gas, Ø 110 mm	<b>71,-</b>
<b>EKG130</b>	Balancing damper for flue gas, Ø 130 mm	<b>78,-</b>
<b>EKG130M</b>	Balancing damper for flue gas, Ø 130 mm, with measuring point	<b>119,-</b>

Dampers painted in colour are available, but have to be specially made at an additional cost.  
Longer delivery time.

## Accessories - Flanges & Mounting kits

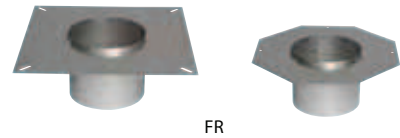

FR

Flange Type	Description for Chimney Fan type	for Chimney ID mm	Price €
<b>FR1-ID</b>	RSV009, RSV160	125-150-175-200	<b>134,-</b>
<b>FR2-ID</b>	RSV012, RSV200, RS009, RS255, RSVG200	125-150-175-200-250	<b>161,-</b>
<b>FR3-ID</b>	RSV014, RSV250, RS012, RS014, RS285, RSHG12, RSHG14, RSVG250	150-175-200-250-300-350	<b>234,-</b>
<b>FR4-ID</b>	RSV016, RSV315, RSV400, RSV450, RS016, RSVG315	200-250-300-350-400	<b>318,-</b>
Type	Description		Price €
<b>1100251</b>	Anti Vibration Bolts		<b>49,-</b>
<b>RSD</b>	Dilution bolts for RS and RSV on brick stacks		<b>41,-</b>

Flanges are inclusive of anti-vibration bolts.

Flange not required on brick or metal stack, use adjustable feet.

Other sizes are available, but have to be specially made at an additional cost. Longer delivery time.

## Accessories - Isolation switch



REP-AFB

REPSW 2X16

Type	Description	Price €
<b>REP-AFB</b>	Isolation switch, 2-pole use with EFC16, EFC35	<b>284,-</b>
<b>REPSW 2X16</b>	Isolation switch, 4-pole use with EFC18, EFC21 & EFC25	<b>204,-</b>

## Spares

Type	Description	Price €
<b>PDS-BOX</b>	Pressure differential switch in IP54 enclosure including connection accessories.	<b>417,-</b>